



CE 0036



ChemValve-Schmid  
Armaturentechnik



2007/06 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::


::Data Sheet:: | ::Chapter 6::

Page 1/2

::Double-Disc Check Valve Type DDC:: | ::DN 50 - 600:: | ::PN 40:: | ::ANSI 150/300::

## Double-Disc Check Valve Type DDC DN 50 - 600

Designation	Material
Body	see table
Disc	see table
Closing spring	1.4401
Stop pin	1.4435
Pin	1.4435
Centre ring	page 6.01/2

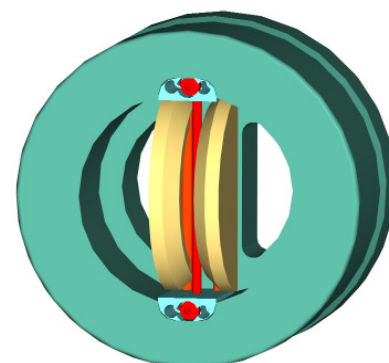

### Technical specifications

Placement between flange according to DIN EN 1092-1, PN 10  
 Overall lengths according to DIN EN 558-1, Gr. 16  
 Operational limits according to DIN EN 1092-1  
 Identification according to DIN EN 19

### Utilisation

For liquids, gases and steams in all process technology.

### Constructional features

Centring through body-outside diameter  
 Excentric disc for wide opening angle and minimum pressure drops

### Special types

Placement between flange according to DIN EN 1092-1, PN 16-40 and  
 ANSI B16.6 CL.150-300 with centre ring according  
 to the following page 6.01/2.

Designation: **DDC- 6 4 6 4 - E - 1 5 0**  
**DDC- □□ - □□ - □ - □□□** → **DN 50 - 600**

Body			Disc			Soft sealing		
Material	Nr.	Code	Material	Nr.	Code	Material	Temperatur	Code
Stainless steel	1.4301	11	Stainless steel	1.4301	11	EPDM	-50 bis 130°C	E
Steel	1.0038	27	Steel	1.0038	27	NBR	-30 bis 120°C	P
Bronce	2.1090	33	Bronce	2.1090	33	VITON	-20 bis 200°C	V
Austenit	1.4404	64	Austenit	1.4404	64	PTFE	-200 bis 200°C	T
						metallic		M

Subject to change without notice



CE 0036



**ChemValve-Schmid**  
Armaturentechnik




2007/06 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::

**::Data Sheet:: | ::Chapter 6::**

Page 2/2

::Double-Disc Check Valve Type DDC:: | ::DN 50 - 600:: | ::PN 40:: | ::ANSI 150/300::

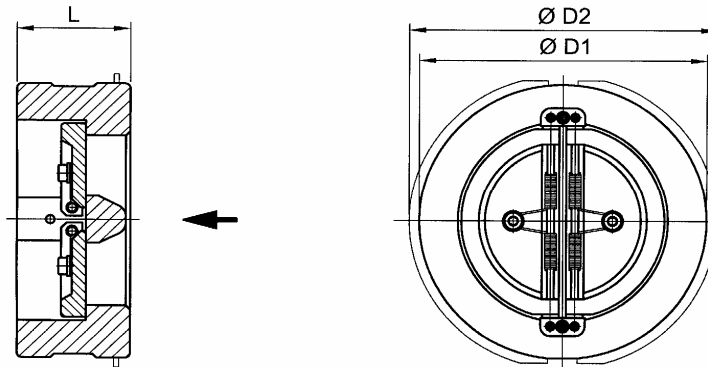

DN (mm)	50	65	80	100	125	150	200	250	300	350	400	450	500	600
DN (zoll)	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L	43	46	64	64	70	76	89	114	114	127	140	152	152	178
Ø D1,PN10	107	127	142	162	192	218	273	328	378	438	489	539	594	695
Ø D2,PN16	107	127	142	162	192	218	273	328	378	444	495	555	617	731
Ø D2,PN25	107	127	142	170	192	226	283	338	400	457	514	564	624	731
Ø D2,PN40	107	127	142	170	192	226	290	352	417	474	546	571	628	747
Ø D2,ANSI150	101	120	133	170	192	218	273	338	400	447	511	546	603	714
Ø D2,ANSI300	107	127	142	177	212	247	304	352	417	482	536	593	650	771
Gewicht (Kg)	2.4	3.6	5.7	7.4	10.7	15.2	28.2	51	66	95	132	178	200	270

For the hatched pressure rates has to be used a centre ring (price list extracharges 6.35)

**Opening pressures (mbar)**

DN (mm)	50	65	80	100	125	150	200	250	300	350	400	450	500	600
DN (zoll)	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
ΔP ↑	17	15	15	14	14	17	19	21	22	24	26	29	30	32
ΔP →	5	5	5	5	5	5	5	5	5	5	5	5	5	5

**Pressure drop diagramm**

Pressure drop diagram for water at 20°C with opened valve and horizontal flow.  
For calculating the pressure drop of the medium the equivalent water flow volume has to be calculated..

$$\dot{V}_w = \dot{v} \sqrt{\frac{\rho}{1000}}$$

- $\dot{V}_w$  = Equivalent water flow volume in m3/h
- $\rho$  = Density of the medium (in use) kg/m3
- $\dot{v}$  = Flow volume of the medium (in use) in m3/h

