



CE 0036



ChemValve-Schmid
Armaturentchnik



2008/11 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::


::Data Sheet:: | ::Chapter 3:

Page 1/6

::Non Return Valve Type CSD:: | ::DN015 - 100:: | ::PN6 - 40:: | ::ANSI150 - 300::

Non Return Valve Type CSD DN015 - 100

| Designation | Material |
|---------------|-----------|
| Body | see table |
| Valve plate | 1.4404 |
| Spring holder | 1.4401 |
| Spring | 1.4401 |
| Soft sealing | see table |

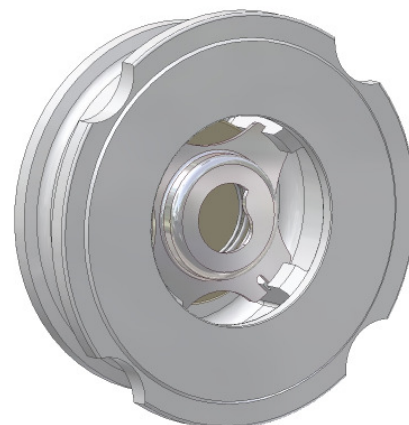

Technical Specifications

Classification of these products according to DGRL 97/23/EC, fluid group 1

Installation with sealing between flanges according to

DIN EN 1092-1 Form B1, PN 6-40 and ANSI B16.5 Class 150/ 300 RF

Nominal pressure max. PN40


Operational limits according to DIN EN 1092-1 and AD-Merkblätter W10

Tightness according to DIN EN 12266-1, Leakage Rate D (Sealing M, T) and Leakage Rate A (Sealing E, P, V)

Overall lengths according to DIN EN 558-1, line 49

Identification according to DIN EN 19

Packed in separate card board boxes

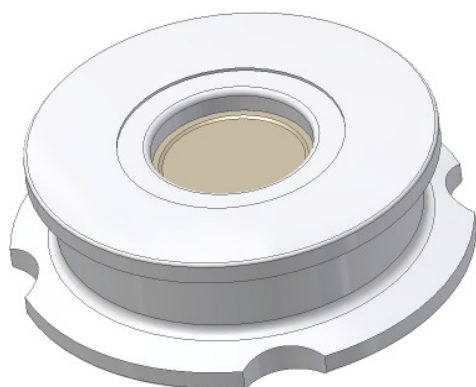

Utilisation

For liquids, gases and steams in all process technologies

Constructional features

Centre ring integrated on the body

Guiding of valve plate by body ribs

New planed spring cap for an optimal safety

Serially adequate for PN 6-40 and ANSI Class 150/ 300

Special Types

Hastelloy C4 springs (up to 400°C) and Nimonic (up to 500°C).

Special springs for different opening pressures up to max. 400 mbar

Designation **CSD- 6 4 6 4 - M - 1 0 0**
CSD- □□ - □□ - □ - □□□ → DN015 - 100

| Body | | | Valve plate | | | Soft sealing | | |
|----------|--------|------|-------------|--------|------|--------------|---------------|------|
| Material | Nr. | Code | Material | Nr. | Code | Material | Temperatur | Code |
| Steel | 1.0619 | 27 | Austenit | 1.4404 | 64 | Metal-seated | -200 to 500°C | M |
| Austenit | 1.4408 | 64 | | | | EPDM | -50 to 130°C | E |
| | | | | | | NBR | -30 to 120°C | P |
| | | | | | | VITON | -20 to 200°C | V |
| | | | | | | PTFE | -200 to 200°C | T |

Subject to change without notice



CE 0036



ChemValve-Schmid
Armaturentechnik




2008/11 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::

::Data Sheet:: | ::Chapter 3:

Page 2/6

::Non Return Valve Type CSD:: | ::DN015 - 100:: | ::PN6 - 40:: | ::ANSI150 - 300::

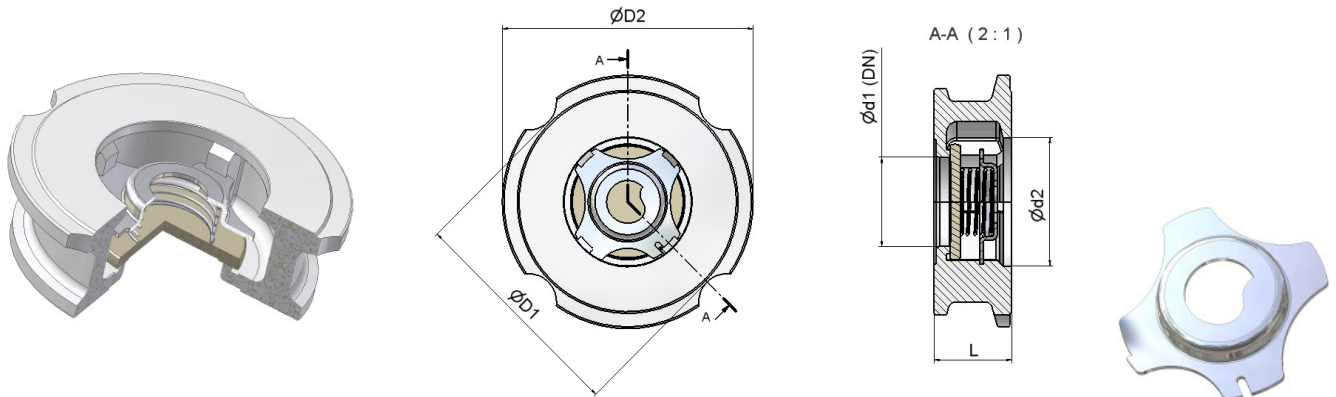

| DN (mm) | 015 | 020 | 025 | 032 | 040 | 050 | 065 | 080 | 100 |
|-----------|------|------|------|--------|--------|-----|--------|------|---------|
| DN (zoll) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |
| Ø d1 | 15 | 20 | 25 | 32 | 39 | 48 | 62 | 72.5 | 89 |
| Ø d2 | 26 | 31 | 36 | 44 | 51.5 | 62 | 77.5 | 92 | 107 |
| Ø D1 | 44 | 54 | 63.5 | 73 | 82.5 | 96 | 116 | 132 | 152 |
| Ø D2 | 51 | 61 | 71 | 79.5 | 92 | 107 | 127 | 142 | 162/168 |
| L | 16 | 19 | 22 | 28 | 31.5 | 40 | 46 | 50 | 60 |
| weight | 0.1 | 0.2 | 0.3 | 0.5 | 0.7 | 1.1 | 1.6 | 3.0 | 3.5 |

Opening pressures (mbar)

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|
| ΔP ↑ | 25 | 25 | 25 | 27 | 28 | 29 | 30 | 31 | 33 |
| ΔP → | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| ΔP ↓ | 15 | 15 | 15 | 13 | 12 | 11 | 10 | 9 | 7 |

Opening pressures without spring (mbar)

| | | | | | | | | | |
|------|---|---|---|---|---|---|----|----|----|
| ΔP ↑ | 5 | 5 | 5 | 7 | 8 | 9 | 10 | 11 | 13 |
|------|---|---|---|---|---|---|----|----|----|


If lowest opening pressures are necessary, the valves without spring can be installed in vertical directions with direction of flow from bottom to top.

Pressure drop diagram

Pressure drop diagram for water at 20°C with opened valve and horizontal flow. For calculating the pressure drop of the medium the equivalent water flow volume has to be calculated.

$$\dot{V}_w = \dot{V} \sqrt{\frac{\rho}{1000}}$$

- \dot{V}_w = Equivalent water flow volume in m3/h
- ρ = Density of the medium in kg/m3
- \dot{V} = Flow volume of the medium in m3/h (working condition)

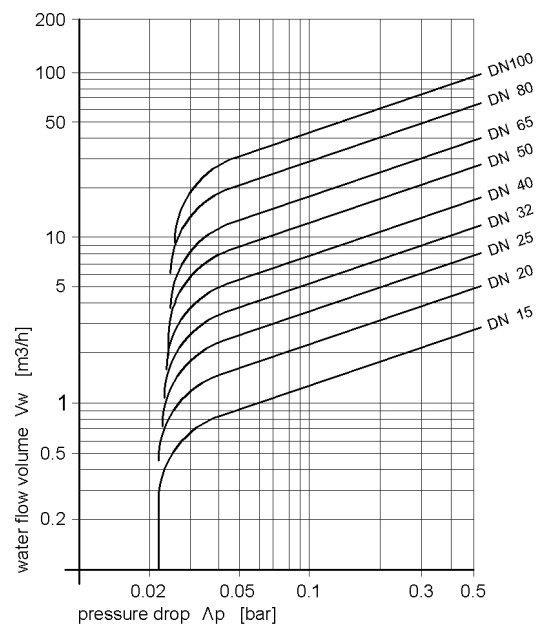



CE 0036



ChemValve-Schmid
Armaturentechnik



2008/11 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::


::Data sheet:: | ::Chapter 3::

Page 3/6

::Non Return Valve Type CVD:: | ::DN015 - 100:: | ::PN6 - 40 or PN6 - 16::

Non Return Valve Type CVD DN015 - 100

| Designation | Material |
|--------------|-----------|
| Body | see table |
| Valve plate | see table |
| Spring cap | 1.4401 |
| Spring | 1.4401 |
| Soft sealing | see table |

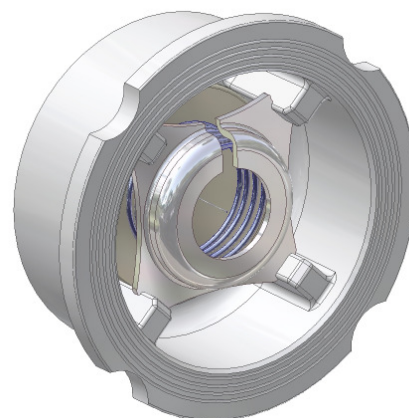

Technical specifications

Placement between flange according to DIN EN 1092-1, PN 6-40

Nominal pressure max. PN40


Overall lengths according to DIN EN 558-1, Gr. 49

Tightness according to DIN EN 12266-1, Leakage Rate D (Sealing M, T) and Leakage Rate A (Sealing E, P, V)

Operational limits according to DIN EN 1092-1

Identification according to DIN EN 19

Packed in separate card board boxes

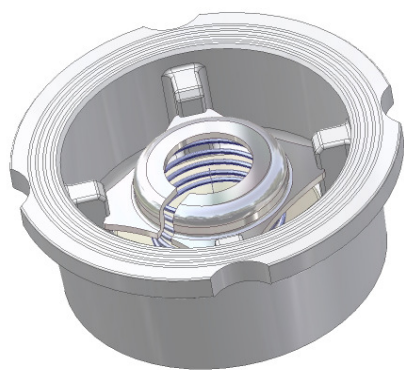

Utilisation

For liquids, gases and steams in all process technology.

Constructional features

Centring integrated on the body

Guiding of valve plate by body ribs

Special types

Hastelloy C4 springs (up to 400°C) and Nimonic (up to 500°C).

Special springs for different opening pressures up to max. 500mbar

Holding flange on operation for ventilation or vacuum breaker

Designation: CVD- 64 64 - M - 100
CVD- □□ - □□ - □ - □□□ → DN015 - 100

| Body | | | Valve plate | | | Soft sealing | | |
|------------------|--------|------|------------------|--------|------|----------------------------------|------------------|------|
| Material | Nr. | Code | Material | Nr. | Code | Material | Temperatur | Code |
| Bronze | 2.1050 | 33 | Austenit | 1.4404 | 64 | Metal-seated | -200 up to 500°C | M |
| Austenit Mo-free | 1.4301 | 65 | Austenit Mo-free | 1.4301 | 65 | EPDM | -50 up to 130°C | E |
| Uranus | 1.4539 | 68 | Uranus | 1.4539 | 68 | NBR | -30 up to 120°C | P |
| Titanium | 3.7035 | 90 | Titanium | 3.7035 | 90 | VITON | -20 up to 200°C | V |
| Hastelloy B | 2.4600 | 94 | Hastelloy B | 2.4600 | 94 | PTFE | -200 up to 200°C | T |
| Hastelloy C | 2.4883 | 95 | Hastelloy C | 2.4819 | 95 | Depending on pressure and medium | | |

Subject to change without notice



CE 0036



ChemValve-Schmid
Armaturentechnik




2008/11 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::

::Data sheet:: | ::Chapter 3::

Page 4/6

::Non Return Valve Type CVD:: | ::DN015 - 100:: | ::PN6 - 40 or PN6 - 16::

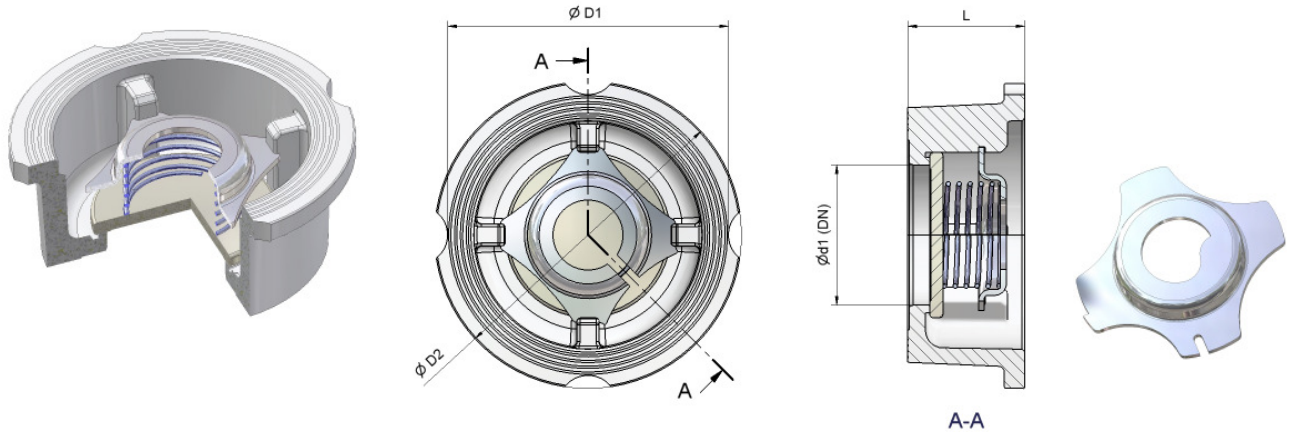

| DN (mm) | 015 | 020 | 025 | 032 | 040 | 050 | 065 | 080 | 100 |
|-----------|------|------|-----|--------|--------|-----|--------|-----|---------|
| DN (zoll) | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |
| Ø d1 | 15 | 20 | 25 | 32 | 39 | 48 | 62 | 72 | 89 |
| Ø D1 | 43 | 53 | 63 | 75 | 86 | 96 | 116 | 133 | 154 |
| Ø D2 | 50 | 60 | 70 | 81 | 91 | 105 | 126 | 148 | 164/170 |
| L | 16 | 19 | 22 | 28 | 31.5 | 40 | 46 | 50 | 60 |
| Weight | 0.1 | 0.2 | 0.3 | 0.5 | 0.7 | 1.1 | 1.6 | 3.0 | 3.5 |

Opening pressures (mbar)

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|
| ΔP ↑ | 25 | 25 | 25 | 27 | 28 | 29 | 30 | 31 | 33 |
| ΔP → | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| ΔP ↓ | 15 | 15 | 15 | 13 | 12 | 11 | 10 | 9 | 7 |

Opening pressures without spring (mbar)

| | | | | | | | | | |
|------|---|---|---|---|---|---|----|----|----|
| ΔP ↑ | 5 | 5 | 5 | 7 | 8 | 9 | 10 | 11 | 13 |
|------|---|---|---|---|---|---|----|----|----|

If lowest opening pressures are necessary, the valves without spring can be installed in vertical directions with direction of flow from bottom to top.

Pressure drop diagram

Pressure drop diagram for water at 20°C with opened valve and horizontal flow.
For calculating the pressure drop of the medium the equivalent water flow volume has to be calculated..

$$\dot{V}_w = \dot{v} \sqrt{\frac{\rho}{1000}}$$

- \dot{V}_w = Equivalent water flow volume in m3/h
- ρ = Density of the medium (in use) kg/m3
- \dot{v} = Flow volume of the medium (in use) in m3/h

