


TL-51

Cylinder-type Control Valve

- Service:
For Steam, Air, Water, Oil and other fluids
Operating air pressure: 3-5 kg/cm²g
- Remark:
Up 4" are double acting cylinder actuator.
Connection rating JIS 10K

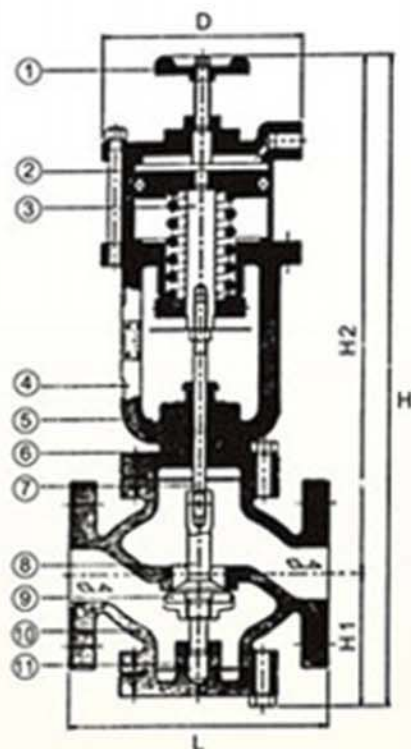

Material list

NO	Parts name	FC 250	SUS 304
1	Handle wheel	FC 250	FC 250
2	Cylinder	STKM 13C	STKM 13C
3	Actuator stem	SS41	SS41
4	Yoke	FC 250	FC 250
5	V-packing	TEFLON	TEFLON
6	Bonnet	FC 250	SUS 304
7	Plug stem	SUS 304	SUS 304
8	Plug	SUS 304	SUS 304
9	Sealing ring	TEFLON	TEFLON
10	Body	FC 250	SUS 304
11	Bottom flange	FC 250	SUS 304

JIS-10K Dimensions

		UNIT : MM					
MM	INCH	L	H1	H2	H	D	
20	3/4"	160	90	320	410	120	
25	1"	160	90	320	410	120	
32	1 1/4"	160	90	320	410	120	
40	1 1/2"	200	100	400	500	150	
50	2"	230	108	412	520	150	
65	2 1/2"	290	120	440	560	175	
80	3"	260	130	450	580	175	
100	4"	280	145	515	660	205	