




Cylinder Operated Control Valve

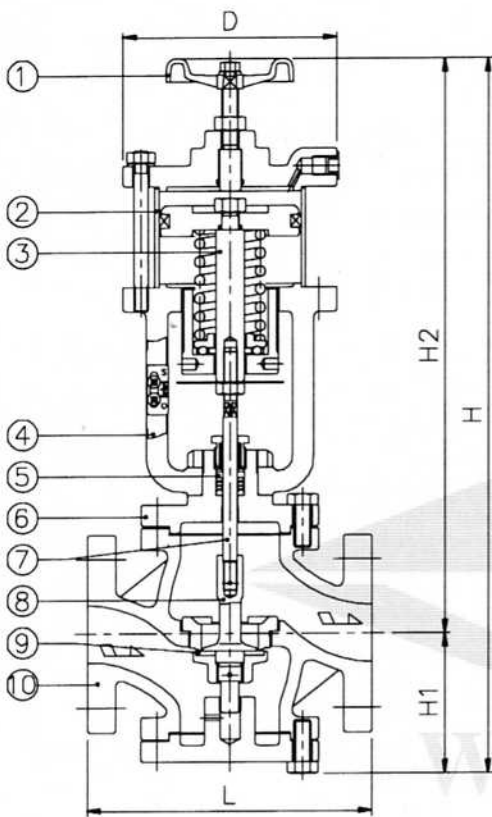

SERVICE :

For steam, air, water, oil and other fluids.

Operating Air Pressure : 3-5kg/cm²

Parts & Material

Part Name		FC 250	SUS 304
1	Handle Wheel	Aluminum	Aluminum
2	Cylinder	Aluminum Alloy	Aluminum Alloy
3	Actuator Stem	SS41	SS41
4	Yoke	FC 250	FC 250
5	V-Packing	PTFE	PTFE
6	Bonnet	FC 250	SCS 13
7	Plug Stem	SUS 304	SUS 304
8	Plug	SUS 304	SUS 304
9	Sealing Ring	RTFE	RTFE
10	Body	FC 250	SCS 13

**SCHP2, SCS14 and other special materials are also available.

Dimensions

Valve Size		L	H1	H2	H	D
mm	inch					
15	1/2	130	82	339	421	120
20	3/4	150	82	339	421	120
25	1	160	82	339	421	120
32	1-1/4	180	93	349	442	120
40	1-1/2	200	99	406	505	150
50	2	230	106	413	519	150
65	2-1/2	290	118	445	563	175
80	3	310	132	535	667	200
100	4	350	149	552	701	200

**JIS, ANSI and DIN standard are also available.