


## DUG-1S | Sight Glass

### ► Specifications

Working Pressure (kgf/cm <sup>2</sup> )	Max. 10
Working Temperature (°C)	Max. 200
Type	Flapper
Connection	PT Screwed
Materials	Body : Ductile Iron
	Trim : Stainless Steel

### ► Dimensions

Size	d	L	H
15A	PT 1/2"	95	82
20A	PT 3/4"	95	82
25A	PT 1"	100	82

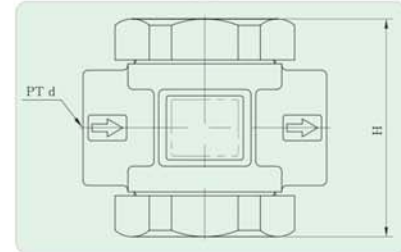


## DUG-1F | Sight Glass

### ► Specifications

Working Pressure (kgf/cm <sup>2</sup> )	Max. 10
Working Temperature (°C)	Max. 200
Type	Double Window
Connection	JIS 10K Flanged
Materials	Body : Ductile Iron
	Trim : Stainless Steel

### ► Dimensions

Size	d	L	H	Size	d	L	H	Connection
15A	PT 1/2"	150	80	32A	PT 1 1/4"	175	110	JIS 10K Flanged
20A	PT 3/4"	150	80	40A	PT 1 1/2"	200	110	
25A	PT 1"	170	90	50A	PT 2"	220	130	

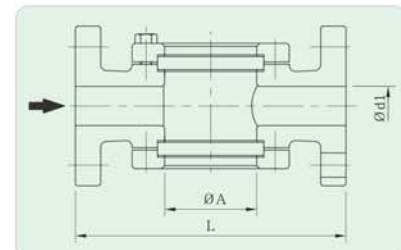

## DUG-5F | Sight Glass

### ► Specifications

Working Pressure (kgf/cm <sup>2</sup> )	Max. 5
Working Temperature (°C)	Max. 200
Working Fluid	Light
Connection	JIS 5K Flanged
Materials	Body : Ductile Iron, Cast Iron
	Trim : Heat Treatment Glass

### ► Dimensions

Size	d	L	H	Size	d	H	L	Connection
25A	25	86	90	100A	100	178	210	JIS 5K Flanged
40A	40	102	100	125A	125	208	245	
50A	50	115	115	150A	150	232	310	
65A	65	140	160	200A	200	294	380	
80A	80	158	180	250A	250	344	400	

